



ESC Code: 007935

Detects without Obstructions. Space-filling and Sensitive.

Ultrasonic presence detector US360 is perfect for offices, conference rooms, storerooms and classrooms. The 36m² presence detection zone envelops objects as opposed to penetrating them regardless of temperature. Electronic reach adjustable along with COM1 switching.

Scan Here



Required Accessory (Only One Required)




000370



000363

Ideal Application:




- Changing Rooms
- Classroom
- Recreation Room
- Open-plan Office

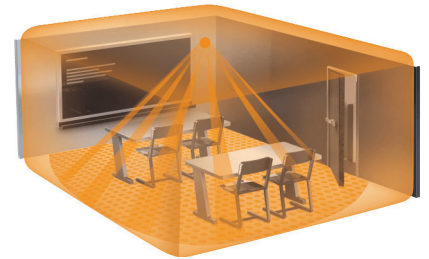

Dimensions (mm)	68 x 120 x 120
Detection Area	Defined Space
IP Rating	IP20
Max. Reach	10m x 10m - 79m ²
Delay Time	30 Sec - 30 Min
Mounting Height	2.5 - 3.5m
Light Level Settings	10 - 1000 lx
Mounting	Recessed / Surface
Warranty	5 Years
Settings	Manually / Smart Remote
Technology	Ultrasonic (40kHz)

Max. Load on Switched Relay Output (L')	
GLS	2000W
LED	600W

Types Available: Dali, Dali2, KNX

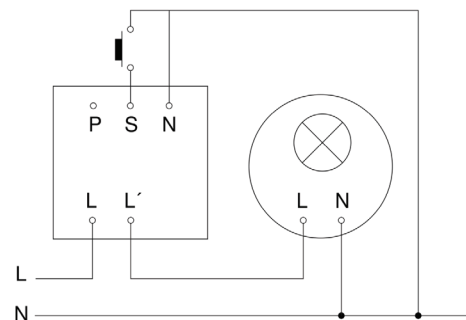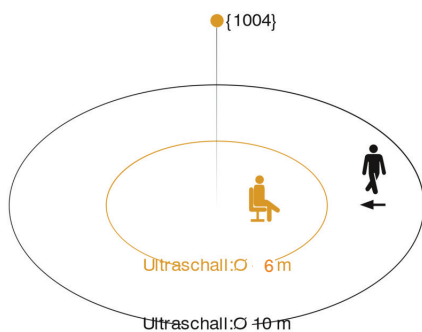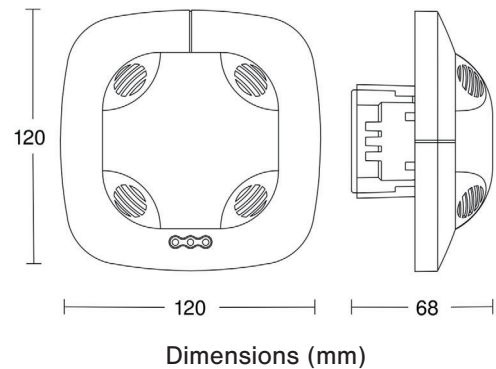

Master Circuit Diagram



Ultrasonic Sensor 360°



Max. Ø6m Presence

2000w

Max. 2000W



IP20



Ideal 2,5 - 3,5m



Indoor Sensor



iQ Mode

TEACH

Teach Mode



Energy Saving