

Stanilite®

Platinum exit LED evago Nexus® wall mount



Range

Platinum range

Product group


Exit LED evago



Features

- LED technology 100,000 hours plus lamp life
- Low power consumption and LED light source for reduced operation and maintenance costs
- Advanced charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- Nexus monitored, wireless
- Bright and uniform exit face luminance
- Architecturally pleasing frameless slim line design
- First-fix plate for quick and easy installation and maintenance
- 24m viewing distance
- Surface mounting (requires space behind the wall for Nexus RF communication module and antenna)
- Product comes standard with running man pictograph straight. Other pictograph diffuser options (arrow left/right) can be ordered separately - see accessories

Catalogue no.	Description
Nexus products	
PELEVRFSWM-1	Platinum exit LED evago Nexus RF wall mount single sided picto
Accessories	
31-BPGEVG	Backplate evago 24m
31-PEVG1	Diffuser evago 24m picto
31-PEVG2	Diffuser evago 24m <picto
31-PEVG3	Diffuser evago 24m picto>
Spare parts	
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah

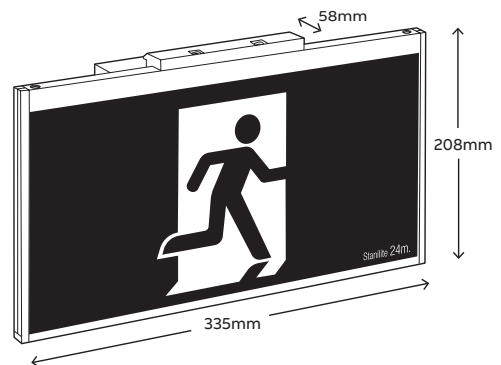

Dimensions			
Item	Length	Width	Height
Control module	159mm	52mm	41mm
Diffuser assembly	335mm	12mm	184mm

Weight	
Model	Weight
Nexus RF	1.6kg

Construction	
Part	Construction
Body	Diecast aluminum
Light guide	Polycarbonate
Diffuser	Acrylic

Light source		
	Model	Light source
	Nexus RF	Multiple LED 0.6W

Power consumption		
	Model	Power consumption
	Nexus RF	2.0W average

Note: Preliminary results

Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards